

DH-PFM931

RG59 Coaxial Cable




Specifications

Model		DH-PFM931
Conductor	Material	Bare copper
	Wire gauge	20AWG, 0.81mm
Insulation	Material	FPE
	Min. average thickness	1.45±0.05mm
	Diameter	3.7mm
Tape	Material	15mm width shielding aluminum foil
	Thickness	0.04mm
Braid	Braiding Material	Copper clad aluminum
	Monofilament diameter	0.12mm*128(16*8)
	Braiding density	95%
Jacket	Material	PVC(65P)
	Min. average thickness	1.0mm
	Diameter	6.1mm
	Color	Black
Impedance		75Ω
Mark spacing		1000mm
General	Length	200m
	Carried standard	MIL-C-17F
	Working temperature	-40° ~+80°
	Storage temperature	-20° ~+70°
	Weight	7.5Kg
	Weight(with packaging)	8.0Kg
	Packaging dimension	335*335*125mm(with blister packaging)

DH-PFM931

Dimensions (mm)

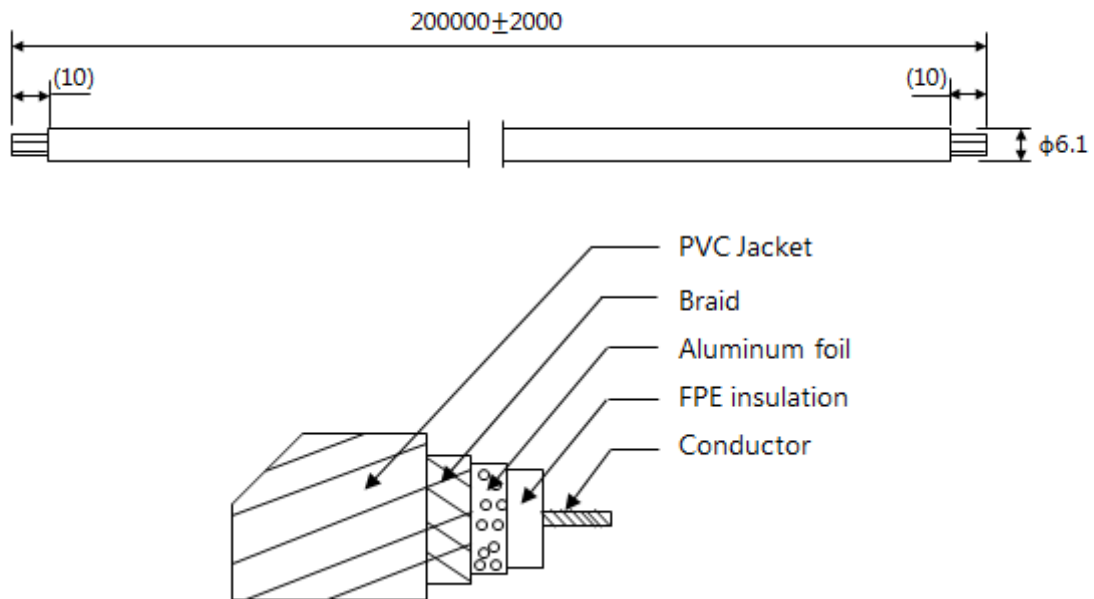

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.