

DH-KIT/HCVR5104HS-S3/2-HFW1200R/2-HDW1200R

4 Channel Tribrid 1080P Compact 1U HCVR Security System with 4 x 1080P HD Cameras



Features

- Support P2P, allowing easier home applications
- All channel synchronous real-time playback
- All cameras with 1080P real-time preview
- H.264 dual-stream video compression
- HDMI/VGA simultaneous video output
- All channel non-real-time 1080P recording
- Multiple network monitoring: web-browser, smart phone/tablet APP

Technical Specifications


Model	DH-KIT/HCVR5104HS-S3/2-HFW1200R-0360B-S3/2-HDW1200R-0360B-S3
System	
Main Processor	Embedded processor
Operating System	Embedded LINUX
Video	
Input	4 channel, BNC
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)
Display	
Interface	1 HDMI, 1 VGA
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Display Split	1/4/6
Privacy Masking	4 rectangular zones (each camera)
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	
Video/Audio Compression	H.264/G.711
Record Rate	Main Stream: 1080P(1~15fps) 1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)
	Sub Stream: D1/CIF/QCIF(1~25/30fps)
Bit Rate	1~6144Kb/s
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Spot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Playback & Backup	
Sync Playback	1/4
Search Mode	Time/Date, MD & Exact search (accurate to second)
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Internal SATA burner/Network
Network	
Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, DDNS, FTP, IP Filter, SNMP, P2P
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	1 SATA port, up to 6TB
Auxiliary Interface	
USB Interface	2 ports(1 Rear), USB2.0

General		
Power Supply	DC12V/2A	
Power Consumption	10W(without HDD)	
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa	
Camera	DH-HAC-HFW1200R-0360B-S3	DH-HAC-HDW1200R-0360B-S3
Image Sensor	1/2.7" 2Megapixel CMOS	
Effective Pixels	1930(H)×1088(V)	
Electronic Shutter	1/50s~1/100,000s,1/60s~1/100,000s	
Video Frame Rate	25fps/50fps/30fps/60fps@720P, 25fps/30fps@1080P	
Synchronization	Internal	
Mini. Illumination	0.02Lux@F2.0(AGC ON), 0Lux IR on	
Video Output	1-channel BNC high definition video output/ CVBS standard definition video output (Can switch)	
Max. IR LEDs Length	20m, Smart IR	
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	DWDR	
Noise Reduction	2D	
Focal Length	3.6mm fixed lens	
Angle of View	H: 89.9°	
Mount Type	M12	
Power Supply	DC12V±25%	
Power Consumption	Max 2.8W	
Working Environment	-40°C~+60°C / Less than 95%RH (no condensation)	
Ingress Protection	IP67	NA
Carton		
Dimension(W×D×H)	387mm×254mm×408mm	

Package:

- DHI-HCVR5104HS-S3(Mouse,12V/2A Power Adapter) *1
- DH-HAC-HFW1200R-0360B-S3 *2
- DH-HAC-HDW1200R-0360B-S3 *2
- 60 Feet BNC&Power Cable(UL) *4
- 12V/3A Power Adapter for Camera *1
- 1 split to 4 power line *1
- Dahua security sign *4

System Connection

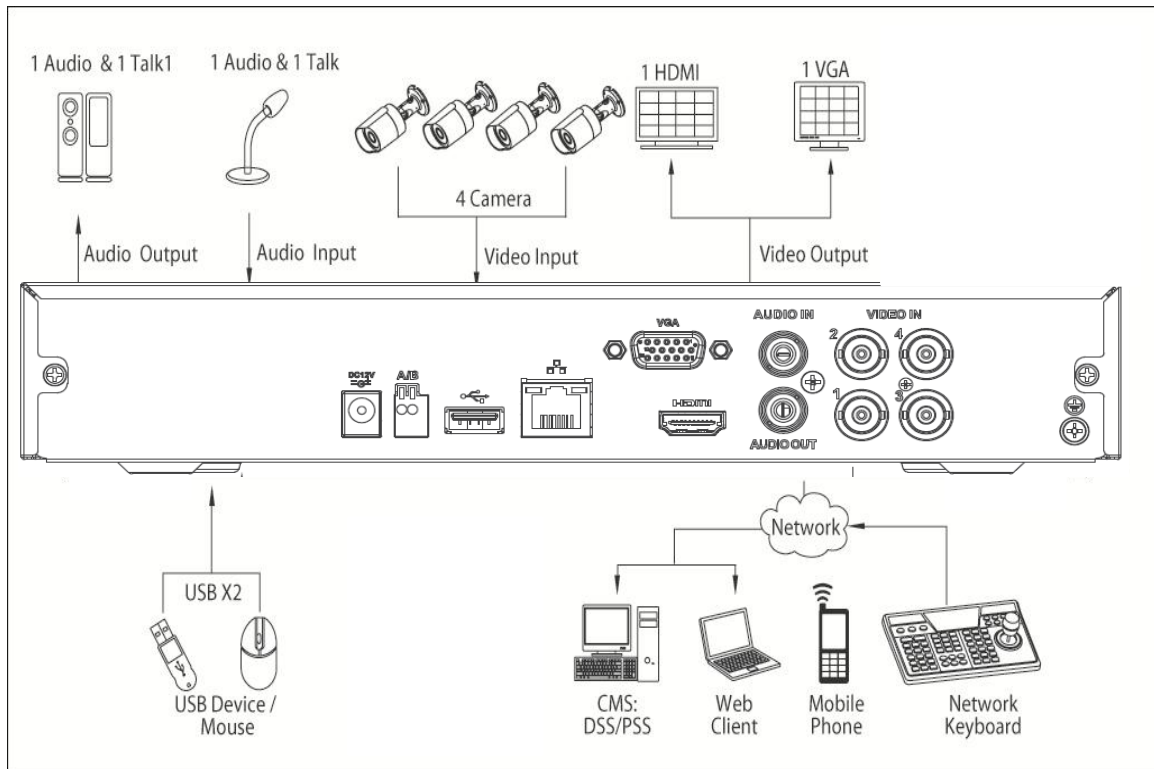

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.