

PFM921

UTP CAT6 Cable



Features

- Bare stranded copper conductor
- 305m UTP CAT6



Specifications

Model		PFM921
Conductor	Material	Bare copper(BC)
	Composition	1/0.56
	Wire gauge	23AWG*4P
Insulation	Material	HDPE
	Min. average thickness	0.2mm
	Diameter	1.0±0.05mm
	Color(4 Pairs)	Orange, white/orange; green, white/green; blue, white/blue; brown, white/brown
Lay of twisted conductors		160mm
Jacket	Material	PVC(65P)
	Min. average thickness	0.65mm
	Diameter	6.5±0.1mm
	Color	Gray and orange are optional
Length		305m
Max. DC resistance of single conductor		6.58Ω/100m
Max. unbalance rate of line pairs' direct current resistance		2.5%
Min. insulation resistance		5000MΩ·km
Max. mutual capacitance()		5.6NF/100m

PFM921

Max. attenuation		19.8(dB/100m, 100MHz)
General	Rated voltage	300V
	Bandwidth	250MHz
	Carried standard	TIA/EIA-568B
	Working temperature	≤70℃
	Packaging length	305m trolley case packaging
	Weight(with packaging)	13.0Kg
	Packaging dimension	335*265*350mm

Dimensions (mm)

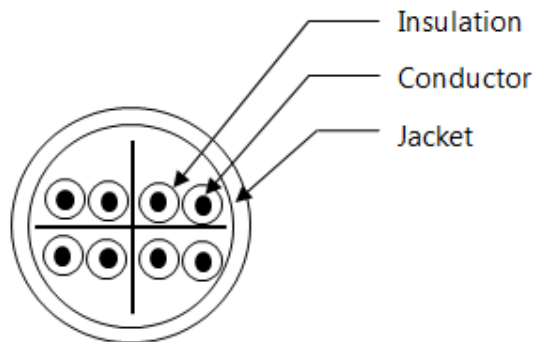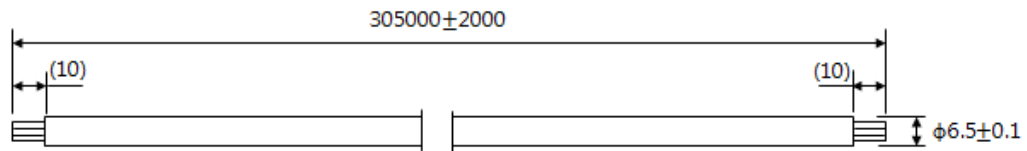

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.